

OXSA ROAD - DIAGONAL PLOW CHOOSED BY PROFESSIONALS!











OXSA ROAD - DIAGONAL PLOW


The OXSA product family is growing with road maintenance products. OXSA ROAD Diagonal Plows belongs to the royal category of road maintenance. The diagonal plow is efficient thanks to its finely honed features and structures like modern housing frame that makes it strong and agile to move.

The starting point for ROAD - diagonal plow has been their suitability for professional contracting use and the varying conditions in Finland. The ploughs development work has been done since 2004 and its features have been refined to their peak.

ROAD series plow have everything you need. As a standard, plows have a hydraulically released blade with a pressure accumulator for safety, a optimised wing that throws even at low speeds and LED lights. The wear blade is a standard 305 mm pitch, so all blade options are available for the diagonal plow depending on the work you need.

Modern manufacturing technology


Thanks to long product development and modern design and manufacturing methods, the body of the diagonal plow has been made very tensile, yet agile and balanced to move. Thanks to the housing structures, the torsional stiffness is high and at the same time unnecessary weight is removed, which reduces the power requirement of the machine. HB400 special steel is used in areas in the frame that need durability and HB500 special steel is used in areas prone to hard wear, such as the blade.

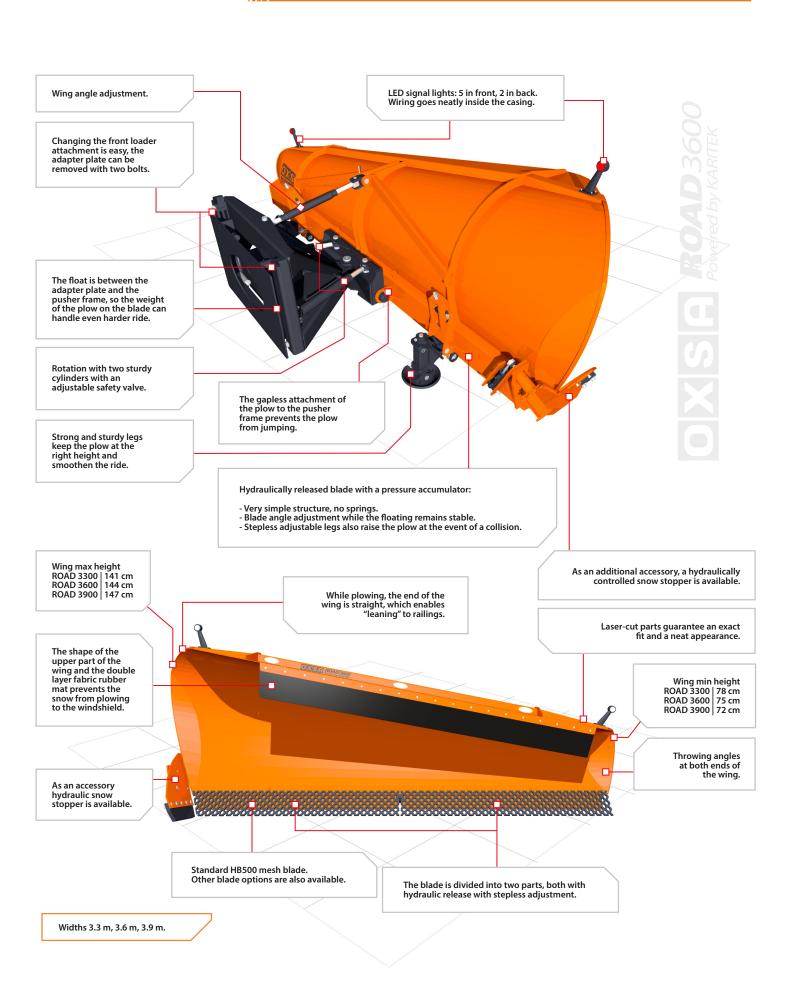

OXSA ROAD Accessories

- Snow stopper
- Smooth blade
- Tooth blade
- Carbine blade



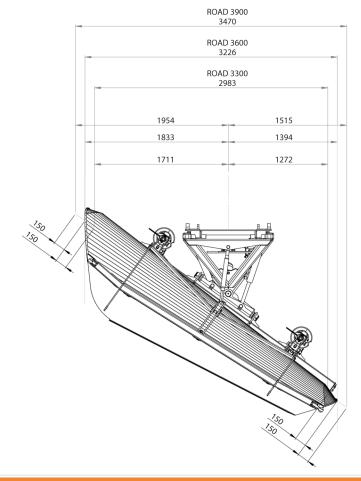

| DIAGONAL PLOW MODEL | | OXSA ROAD | | |
|--------------------------------|----------|-----------------------------------|-----------------------------------|-----------------------------------|
| | | 3300 | 3600 | 3900 |
| Working width | (mm) | 3300 | 3600 | 3900 |
| Height, min | (mm) | 782 | 752 | 722 |
| Height, max | (mm) | 1412 | 1441 | 1471 |
| Edge dimensions, straight wing | (mm) | 3744 | 4044 | 4344 |
| Edge dimensions, rotated wing | (mm) | 2983 | 3226 | 3470 |
| Plow wing turning angle | (deg) | 48 | 48 | 48 |
| Weight | (kg) | 1100 | 1150 | 1200 |
| Blade spring / float | | Hydraulic, stepless adjustment | Hydraulic, stepless adjustment | Hydraulic, stepless adjustment |
| Lights, LED front/back | (pieces) | 2 white + 3 yellow / 2 red | 2 white + 3 yellow / 2 red | 2 white + 3 yellow / 2 red |

Closest Retailer www.oxsa.fi

